

CEMENT PARTICLE BOARD BY OTHERS  
SHOWN INDICATIVELY ONLY

ASH & LACY LINGRID BEAD CLOSURE  
PART CODE: ANC.12  
MATERIAL: ALUMINIUM / COLOUR: BLACK [RAL 9005]

ASH & LACY LINGRID T-BOLT ASSEMBLY  
PART CODE: FIX.07

1.6mm THICK GALVANISED STEEL  
HORIZONTALLY LAID SUPPORT TOPHAT


ASH & LACY LINGRID HALF CARRIER  
PART CODE: ANC.34

ASH & LACY MULLION SUPPORT BRACKETS  
PART CODE: BKT.30  
MATERIAL: ALUMINIUM 6063 T6 / COLOUR: BLACK [RAL 9005]  
\*NON STANDARD\* BRACKET SIZE

ASH & LACY EXTRUDED VERTICAL HALF MULLION  
PART CODE: MUL.06 SM  
MATERIAL : ALUMINIUM / COLOUR: BLACK [RAL 9005]

ASH & LACY LINGRID HOOK ON RAINSCREEN CASSETTE  
3mm THICK ALUMINIUM  
COLOUR: ADAPTA DS-0010 COPPER  
C-11 SEMI TRANSLUCENT PPC

ASH & LACY ASHFLEX TF200GLV POLYETHYLENE BREATHER  
MEMBRANE. (MINIMUM LAPS 150mm TAPE BONDED)

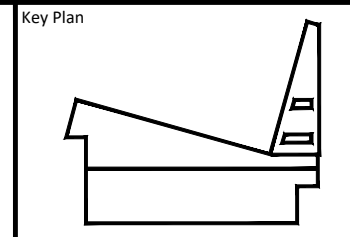

**Material Specification**

- WALL CLADDING SPECIFICATION - 0.26 W/(m²K)**  
**EUROCLAD ELITE SYSTEM 53**  
EUROCLAD 0.5mm THICK STEEL 13.5/3 PROFILED SINUSOIDAL CLADDING SHEET  
COLOUR: HPS20 ULTRA BLACK [RAL 9005]
- 1 No. LAYER 180mm THICK  
KNAUF FC40 FACTORYCLAD INSULATION
- 170mm DEEP GALVANISED STEEL EUROCLAD QUATTRO CAVITY SPACER BRACKET & BAR SYSTEM
- EUROCLAD 0.4mm THICK 19/1000 PROFILED STEEL LINER SHEET (VERTICALLY LAID)  
COLOUR: WHITE POLYESTER FINISH TO REAR
- PARAPET CLADDING SPECIFICATION - 0.26 W/(m²K)**  
KINGSPAN KS1000MR COMPOSITE CLADDING PANEL  
80mm THICK IPN QUADCORE INSULATION CORE  
0.4mm THICK STEEL WHITE POLYESTER INTERNAL FACING  
0.5mm THICK XL FORTE COATED STEEL EXTERNAL FACING  
COLOUR: BLACK [RAL 9005]
- RAINSCREEN CLADDING SPECIFICATION (PERFORATED & UN-INSULATED)**  
ASH & LACY LINGRID HOOK ON RAINSCREEN CASSETTE  
3mm THICK ALUMINIUM  
COLOUR: ADAPTA DS-0010 COPPER  
C-11 SEMI TRANSLUCENT PPC
- ASH & LACY EXTRUDED VERTICAL MULLIONS  
PART CODE: MUL.08 M70  
MATERIAL : ALUMINIUM / COLOUR: BLACK [RAL 9005]
- ASH & LACY MULLION SUPPORT BRACKETS  
PART CODE: BKT.30  
MATERIAL: ALUMINIUM 6063 T6 / COLOUR: BLACK [RAL 9005]
- RAINSCREEN CLADDING SPECIFICATION (NON-PERFORATED & INSULATED) - 0.25 W/(m²K)**  
ASH & LACY LINGRID HOOK ON RAINSCREEN CASSETTE  
3mm THICK ALUMINIUM  
COLOUR: ADAPTA DS-0010 COPPER  
C-11 SEMI TRANSLUCENT PPC
- ASH & LACY EXTRUDED VERTICAL MULLIONS  
PART CODE: MUL.08 M70 / MUL.07 M50  
MATERIAL : ALUMINIUM / COLOUR: MILL FINISH
- ASH & LACY MULLION SUPPORT BRACKETS  
PART CODE: BKT.30  
MATERIAL: ALUMINIUM 6063 T6 / COLOUR: MILL FINISH
- KINGSPAN K15 90mm THICK INSULATION BOARD
- ASH & LACY ASHFLEX TF200GLV POLYETHYLENE BREATHER MEMBRANE. (MINIMUM LAPS 150mm TAPE BONDED)

B	UPDATED TO SUIT COMMENTS AND ISSUED FOR CONSTRUCTION	08-11-17
A	UPDATED TO SUIT COMMENTS AND RE-ISSUED	09-10-17

Rev.	Notes	Date
------	-------	------

REVISIONS

**CONSTRUCTION**  
PROFILES

**ROOF & WALL CLADDING**  
Construction Profiles Ltd.  
Carriage House, Little Broom Street  
Highgate, Birmingham, B12 0EU

Tel: 0121 766 6633 Fax: 0121 766 7792  
Email: contracts@constructionprofiles.co.uk

Status **CONSTRUCTION**

Project  
**WOLVERHAMPTON GIRLS SCHOOL**

Drawing Title  
**PERFORATED / NON-PERFORATED RAINSCREEN CORNER ABUTMENT DETAIL GRIDLINE 2/J**

Scale	NTS	Date	01-09-17
-------	-----	------	----------

Drawing Number **M1581-014**

This drawing is the copyright of Construction Profiles Ltd and is not to be reproduced or distributed without their permission